




Redance in acciaio inox

A

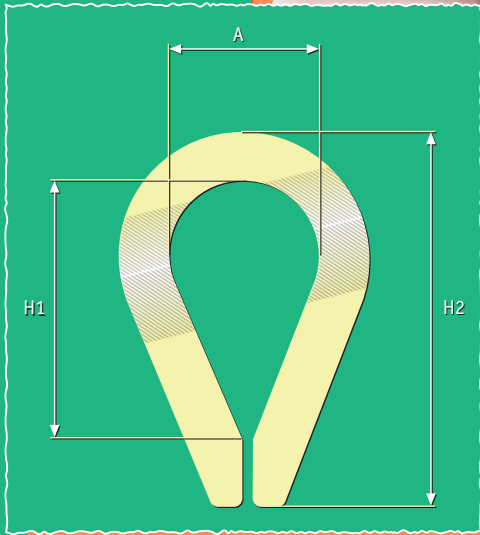

Art.	Cavo Ø Wire Ø		H 1		H 2		A		Spessore Thickness		Peso Weight gr.
	mm	IN.	mm	IN.	mm	IN.	mm	IN.	mm	IN.	
47.01	2	5/64	10	3/8	17	11/16	7	9/32	0,7	1/32	1
47.02	2,5	3/32	14	9/16	22	7/8	8	5/16	0,7	1/32	2
47.03	3	1/8	16	5/8	25	1	9	11/32	1	1/32	3
47.04	4	5/32	18	11/16	28	11/16	11	7/16	1	1/32	4
47.05	5	3/16	22	7/8	34	15/16	14	9/16	1,2	3/64	8
47.06	6	1/4	24	15/16	38	11/2	15	19/32	1,2	3/64	10
47.07	8	5/16	30	13/16	45	13/4	18	11/16	1,5	1/16	18
47.08	10	3/8	37	11/2	58	21/4	23	15/16	1,5	1/16	27
47.09	12	7/16	46	13/4	69	25/8	27	11/16	2	5/64	52
47.10	14	9/16	55	23/16	82	31/4	33	15/16	2,5	3/32	90
47.16	16	5/8	65	21/2	91	31/2	36	13/8	2,5	3/32	110

Manicotti in lega di rame per pressature Copper sleeves

B

Art.	Cavo Ø mm	Wire Ø IN.
46.01	2	5/64
46.02	2,5	3/32
46.03	3	1/8
46.04	4	5/32
46.05	5	3/16
46.06	6	1/4

Pinza per manicotti Pliers for copper sleeves

Pinza per pressature adatta per manicotti cavo Ø mm 2 - 2,5 - 3	48.06	Pliers for copper sleeves (it is suitable for copper sleeves 2 - 2,5 - 3 mm Ø)
---	--------------	--

☛ Nota: Usare la pinza esclusivamente con i manicotti di nostra produzione.

☛ Note: Use only with our copper sleeves.

Stainless steel thimbles



48.06

