


### A GOLFARI A "U" IN ACCIAIO INOX STAINLESS STEEL "U" BOLTS

Art.	M	mm D	IN.	mm I	IN.	mm L	IN.	mm O	IN.	mm F	IN.
34.06	6 MA	8	5/16	40	1 9/16	90	3 9/16	32	1 1/4	50	2
34.08	8 MA	10	3/8	45	1 3/4	100	4	32	1 1/4	58	2 5/16
34.10	10 MA	12	7/16	64	2 1/2	130	5 1/8	44	1 3/4	74	2 15/16

### B GOLFARI A "U" IN ACCIAIO INOX STAINLESS STEEL "U" BOLTS

Art.	M	mm D	IN.	mm I	IN.	mm L	IN.	mm O	IN.	mm F	IN.
34.01	5 MA	5	3/16	30	1 3/16	65	2 9/16	22	7/8	38	1 1/2
34.02	6 MA	6	1/4	33	1 5/16	75	3	24	1 5/16	45	1 3/4
34.03	8 MA	8	5/16	35	1 3/8	86	3 3/8	26	1	52	2 1/16
34.04	10 MA	10	3/8	40	1 9/16	110	4 3/8	35	1 3/8	65	2 9/16

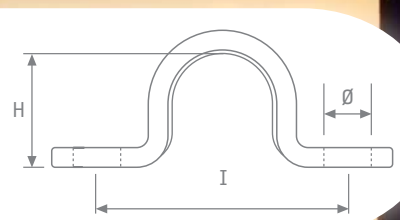

Art.	mm I	IN.	mm H	IN.	mm Ø	IN.	Interno boccola Ø mm	Inside Ø IN.
35.01	31	1 7/32	11	7/16	4	5/32		
35.02	37	1 29/64	13	1/2	5	3/16		
35.03	42	1 21/32	17	1 1/16	5	3/16		
35.04	31	1 7/32			4	5/32	8	5/16
35.05	37	1 29/64			5	3/16	10	3/8
35.06	42	1 21/32			5	3/16	14	9/16
35.07	38	1 1/2	14	9/16	5	3/16		
35.08	34-65	1 5/16-2 1/16	14	9/16	5	3/16		
35.18	27	1 1/16	10	3/8	4	5/32		
35.19	30	1 3/16	12	7/16	5	3/16		

Piastrina per cavallotti [Art. 35.02] **35.09** Backing plate [for art. 35.02]

Art.	mm I	IN.	mm H	IN.	mm Ø	IN.	Filo Ø mm	Material Ø
35.50	39	1 1/2	14	9/16	4	5/32	5	3/16
35.51	46	1 13/16	17	1 1/16	5	3/16	6	1/4

Base girevole - perno Ø mm 5 interasse fori mm 35 - fori Ø mm 5	<b>35.10</b>	Swivel base - pin Ø 3/16" - holes axes distance 1 3/8" holes Ø 3/16"
Base girevole - Ø esterno mm 57 perno Ø mm 5 - fori Ø mm 5	<b>35.13</b>	Swivel base - external Ø 2 1/4" - pin Ø 3/16" holes Ø 3/16"
Cavallotto saldato su base a quattro fori Ø esterno mm 55 - fori Ø mm 5	<b>35.14</b>	Round eye plate - external Ø 2 3/16" - holes Ø 3/16"
Base girevole - Ø esterno mm 47 perno Ø mm 4 - fori Ø mm 4	<b>35.23</b>	Swivel base - external Ø 1 7/8" - pin Ø 5/32" holes Ø 5/32"
Cavallotto saldato su base a quattro fori Ø esterno mm 47 - fori Ø mm 4	<b>35.24</b>	Round eye plate - external Ø 1 7/8" - holes Ø 5/32"
Cavallotto saldato su base a due fori lunghezza mm 75 - larghezza mm 22 - fori Ø mm 6 filo Ø mm 7 - altezza interna mm 11	<b>35.33</b>	Oblong pad eye plate - lenght 2 61/64" - width 7/8" holes Ø 1/4" - material Ø 9/32" - internal height 7/16"
Cavallotto saldato su base a due fori lunghezza mm 88 - larghezza mm 32 - fori Ø mm 6 filo Ø mm 8 - altezza interna mm 14	<b>35.34</b>	Oblong pad eye plate - lenght 3 15/32" - width 1 17/64" holes Ø 1/4" - material Ø 5/16" - internal height 9/16"



>Golfari a "U" in acciaio inox  
>Cavallotti

>Cavallotti in filo  
>Basi  
AISI 316



>Stainless steel "U" bolts  
>Deck clips

>Wire eye straps  
>Bases  
AISI 316

